

VAC³






dynamic



digital

3 DIFFERENT FILTRATION OPTIONS

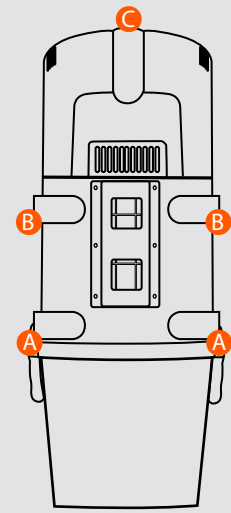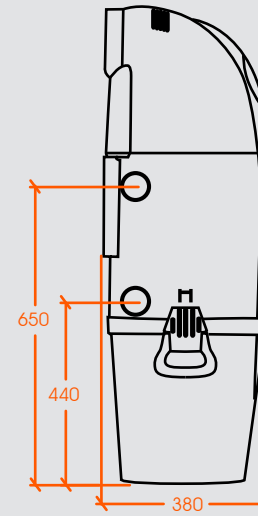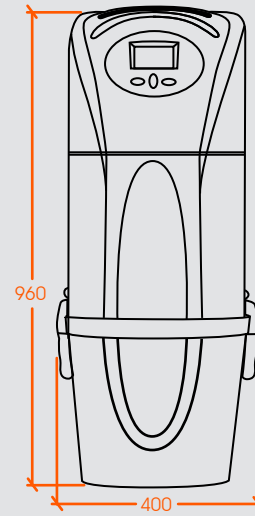

- A AIR INLET FOR DUST BAG AND SELF-CLEANING BAG
- B AIR INLET FOR CARTRIDGE FILTERS
- C EXHAUST

TECHNICAL CHARACTERISTICS

	VAC ³ DYNAMIC 1.5	VAC ³ DIGITAL 1.5	VAC ³ DYNAMIC 1.7	VAC ³ DIGITAL 1.7
Reference	UD7100	UD7120	UD7110	UD7130
Power	1.500 W		1.700 W	
Max. Consumption	9,2 A		8,2 A	
Power supply	230 V		230 V	
Frequency	50/60 Hz		50/60 Hz	
Airwatts	750 W		740 W	
Max. Waterlift	3.700 mmH ₂ O		3.100 mmH ₂ O	
Max. Air-flow	187 m ³ /h		289 m ³ /h	
Noise Level	<60 dB		<60 dB	
Filtration system	TRIPLE SYSTEM		TRIPLE SYSTEM	
Dust container capacity	28 L		28 L	
Digital Display	NO	YES	NO	YES
Hepa filter surface area	6000 cm ²		6000 cm ²	
Pro-Tecta filter surface area	1300 cm ²		1300 cm ²	
Weight	16 Kg		16 Kg	
Number of inlet valves	10		18	
Furthest valve from the unit	40 m		70 m	
Size of Home	500 m ²		1.000 m ²	



CE Mark



RoHS



Insulation Class 2



High energy efficiency



Soft-start



Cartridge filters



Dust Bag



Self-Cleaning Bag